

# HSF

NOTES:  
 Voltage Rating: 50V AC/DC  
 Current Rating: 0.5AMP  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 500V AC/Minute  
 Insulation Resistance: 500MΩ min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact Plating: Sn OR Au OVER Nickel  
 Insulator Material: PA9T+33%GF UL94V-0 BLACK

## Ordering Information


3651-S XXXX-034 XX ROX

No. of Pins  
 006: 06 Pin  
 010: 10 Pin  
 012: 12 Pin  
 014: 14 Pin  
 016: 16 Pin  
 018: 18 Pin  
 020: 20 Pin  
 022: 22 Pin  
 024: 24 Pin

Plating  
 G0=Gold Flash  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin

Packing  
 R=Trays & Reel

Pos	Part No.	DIM F
12-16PIN	CAP2300-M204	3.40
18-24PIN	CAP2300-M202	6.60

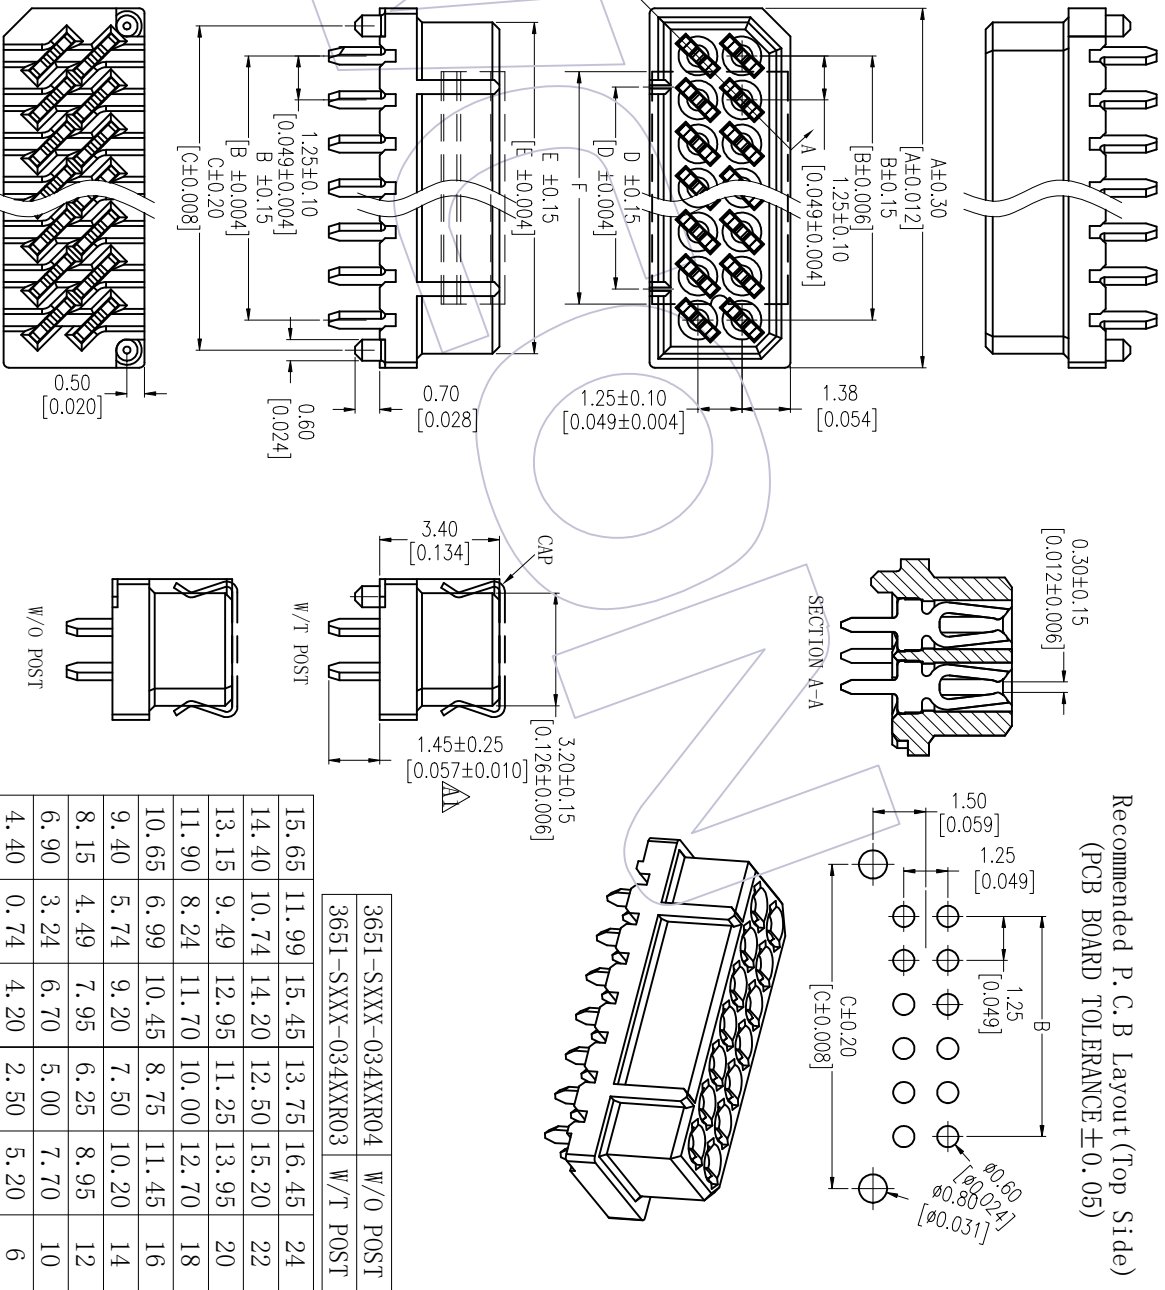

3651-SXXX-034XXXR04	W/O POST
3651-SXXX-034XXXR03	W/T POST

15.65	11.99	15.45	13.75	16.45	24
14.40	10.74	14.20	12.50	15.20	22
13.15	9.49	12.95	11.25	13.95	20
11.90	8.24	11.70	10.00	12.70	18
10.65	6.99	10.45	8.75	11.45	16
9.40	5.74	9.20	7.50	10.20	14
8.15	4.49	7.95	6.25	8.95	12
6.90	3.24	6.70	5.00	7.70	10
4.40	0.74	4.20	2.50	5.20	6
E	D	DIM C	B	A	Pos.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2017.07.11	DIP: 1.30±0.25 → 1.45±0.25	---
A0	2016.10.20	NEW	---

OPERATION	DRAW	DATE	SCALE	FIT
X.X	Dwg	2017.07.11	UNIT	mm
X.XX	CHECK	DATE	SIZE	A4
X.XXX	APPROVE	DATE	SHEET	1/1
Angle			PROJ.	
DIM				

PART NO.	TITLE:
3651-SXXX-034XXXROX	1.25mm BTB FEMALE 180° DIP, H=3.4
Customer NO.	

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com